

King County Back Country Trails Program

Presented to Friends of Big Finn Park Oct.15, 2014

Dennis Burgart dennis.burgart@kingcounty.gov



King County

Call of Duty

- Water Fighters
- Soil Relocation Engineers



What we do


- New Construction
- Reroutes
- Trail fixes - drainage issues, safety hazards, grade issues

How It Works...



Evaluate The Area

- Look at Current Layout
- Look at Problem
- Look at Grades and vegetation
- Solicit Public Knowledge

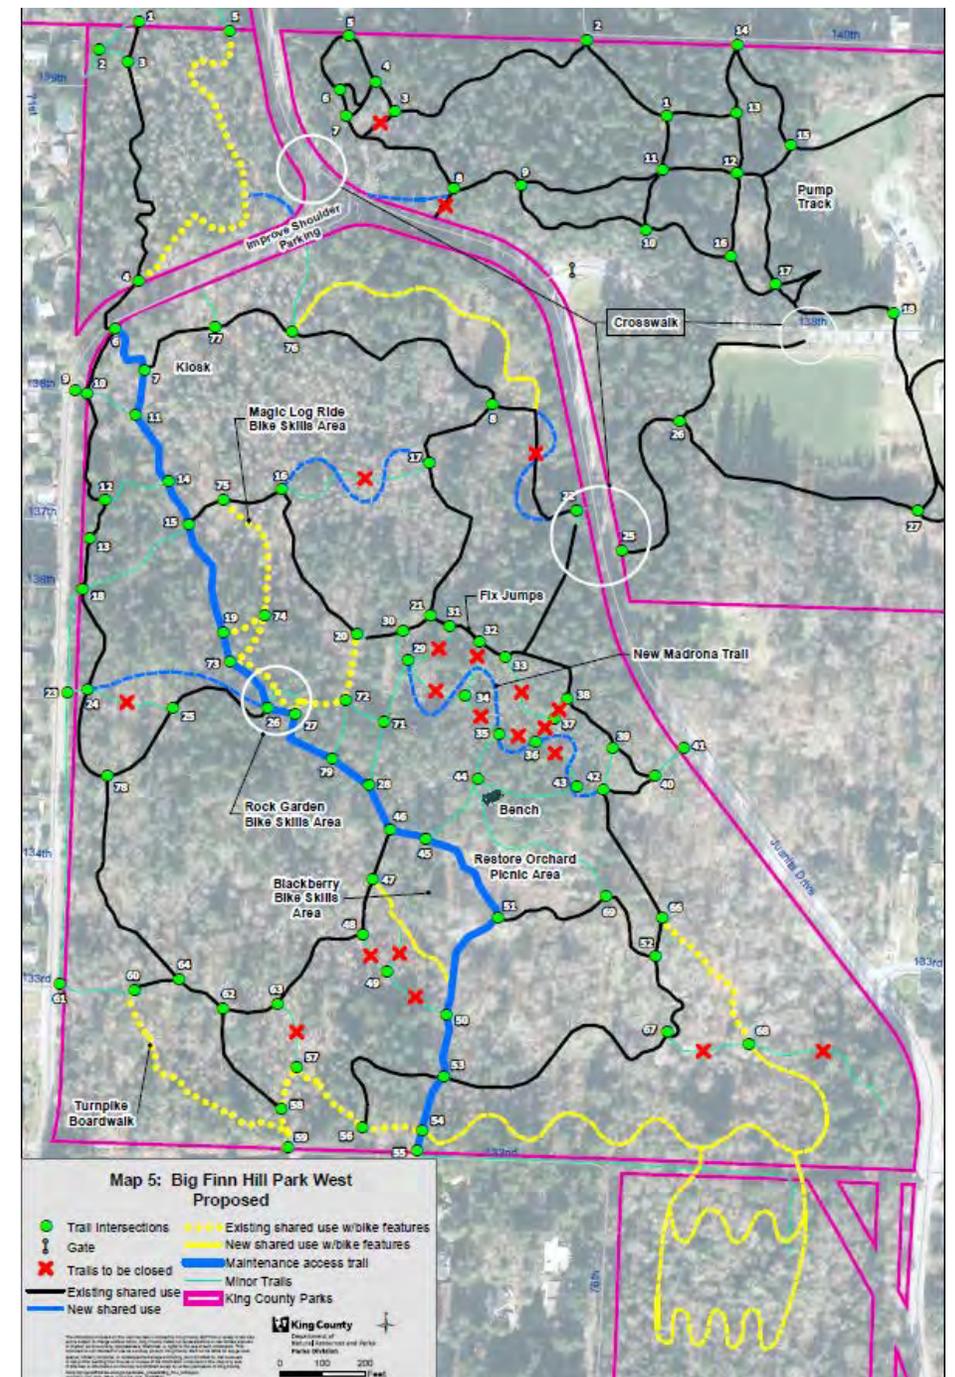

Flag The Proposed Route




Walk Route

Thinking About:

- Flow
- Grade
- Sight Lines
- Safety
- Drainage
- User Groups
- Aesthetics

Remove Vegetation

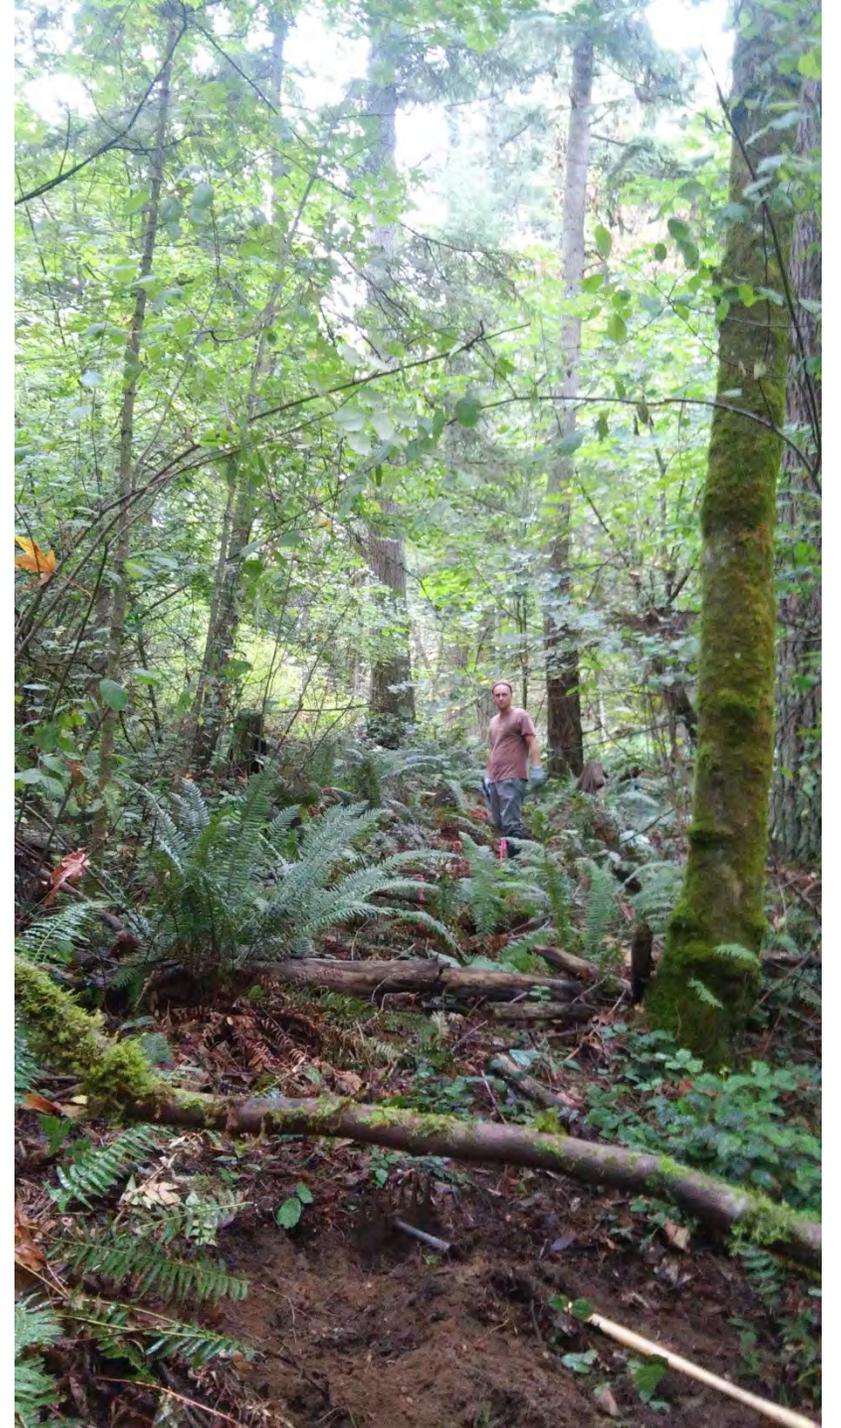

Clear Organic Layer To Mineral Soil

Vegetation/Duff




Organic Soil



Mineral Soil



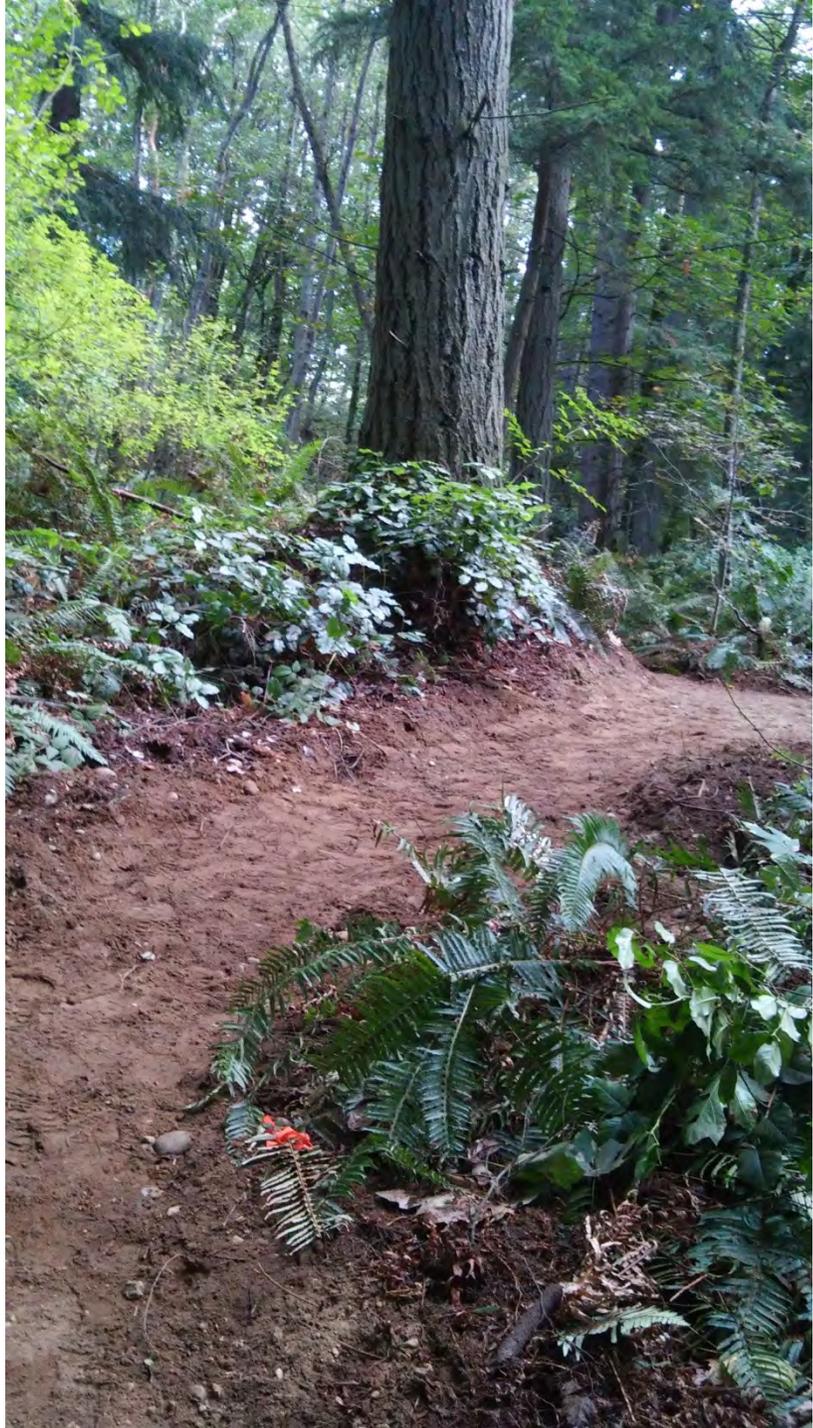

Add Drainage and/or structures



Let Trail Settle



Yearly Maintenance


- Brush
- Clean Drains
- Blow Leaves
- Fill Low Spots



"The greatest good for the greatest number of people in the long run."


Gifford Pinchot 1905

Forest Service Standards

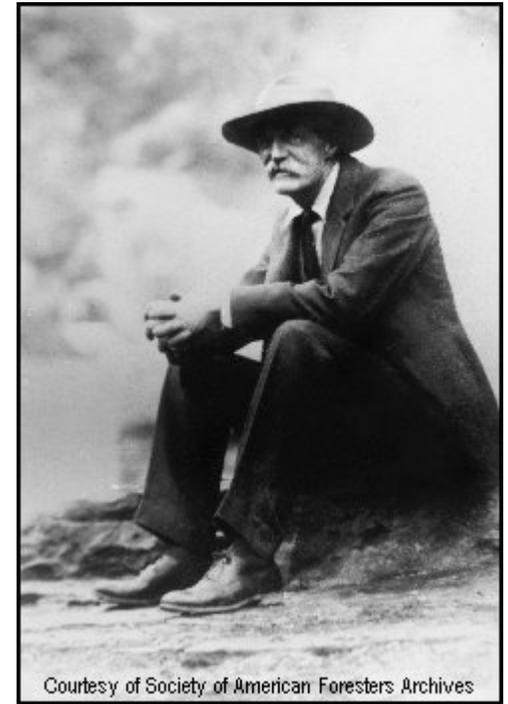

Courtesy of Society of American Foresters Archives

- <http://www.fs.fed.us/recreation/programs/trail-management/trail-fundamentals/>

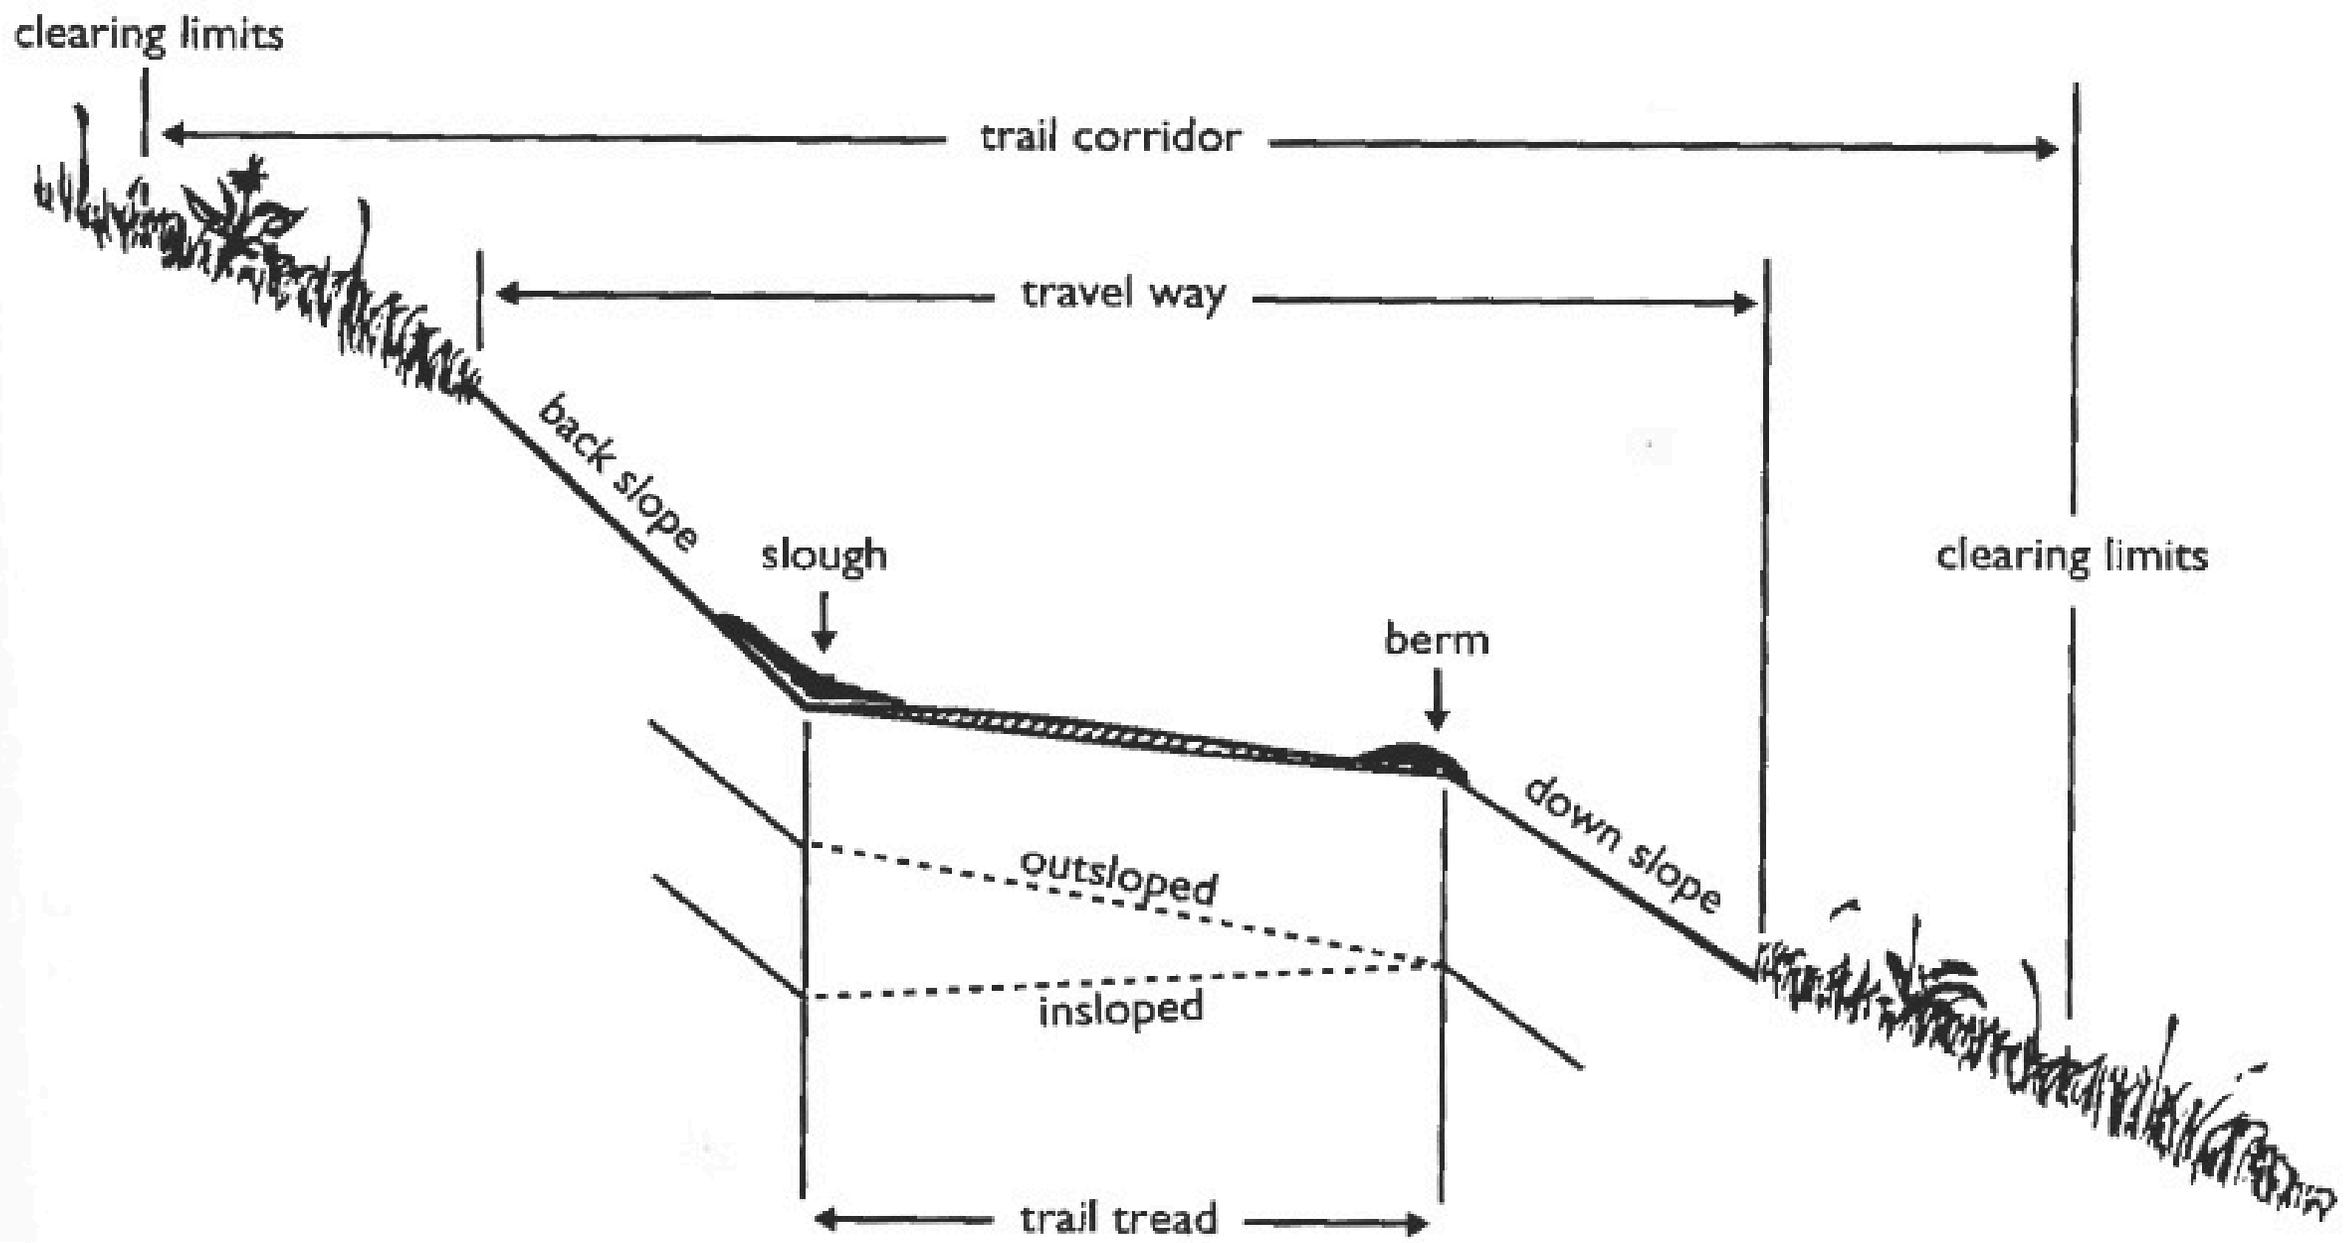


Trail Class 1



TC1 – Constructed Features: Constructed features minimal to non-existent.

TC1 – Tread: Tread intermittent and indistinct.

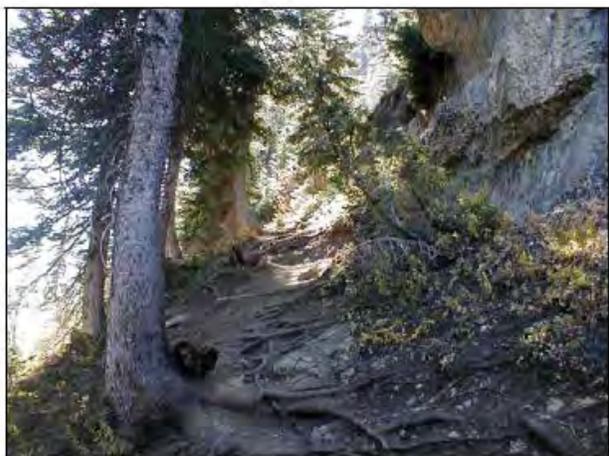

TC1 – Signs: Route identification signing limited to junctions. Route markers present when trail location is not evident.

TC1 – Obstacles: Obstacles common, naturally occurring, often substantial


Trail Class 2



TC2 – Tread: Tread continuous and disc



TC2 – Signs: Route identification signing limited to junctions. Route markers present when location is not evident.

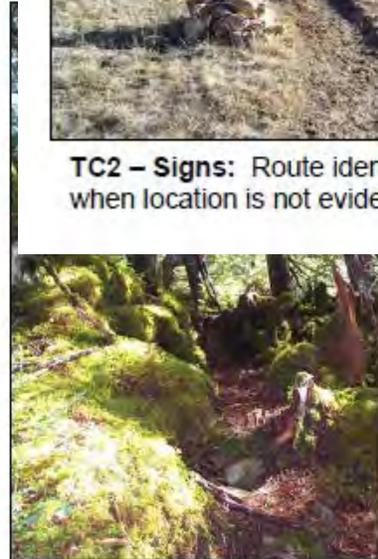

TC2 – Obstacles: Obstacles may be common and substantial. Blockages cleared to define route and protect resource. Vegetation may encroach into trailway.



TC2 – Constructed Features: Structures are of limited size, scale, and quantity.

Trail Class 3



TC3 – Tread: Tread continuous and obvious.



TC3 – Obstacles: Obstacles may be common. Vegetation cleared outside of trailway.



TC3 – Constructed Features: Trail structures (walls, steps drainage, raised trail) may be common and substantial.



TC3 – Signs: Route identification signing at junctions and as needed for user reassurance. Route markers as needed for user reassurance. Destination signing likely outside of wilderness.



TC4 – Tread: Tread wide and relatively irregularities.



TC4 – Signs: Wide variety of signs likely present, informational signs likely, interpretive signs possible.



TC4 – Obstacles: Obstacles infrequent and insubstantial. Vegetation cleared outside of trailway.



TC4 – Constructed Features: Structures frequent and substantial. Trailside amenities may be present.



TC5 – Tread: Tread wide, firm, stable, and generally uniform. Commonly hardened with asphalt or other imported material.



TC5 – Obstacles: Obstacles not present. Grades typically < 8%.



TC5 – Constructed Features: Structures frequent or continuous; may include bridges, boardwalks, curbs, handrails, trailside amenities, and similar features.



TC5: – Signs: Wide variety of signs present, information and interpretive signs common.



TC5 – Typical Rec. Environment / Experience: Recreation environment may be highly modified.

Designed Use HIKER/PEDESTRIAN		Trail Class 1	Trail Class 2	Trail Class 3 ²	Trail Class 4 ²	Trail Class 5 ²
Design Tread Width	Wilderness (Single Lane)	0" – 12"	6" – 18"	12" – 24" Exception: may be 36" – 48" at steep side slopes	18" – 24" Exception: may be 36" – 48" at steep side slopes	Not applicable
	Non-Wilderness (Single Lane)	0" – 12"	6" – 18"	18" – 36"	24" – 60"	36" – 72"
	Non-Wilderness (Double Lane)	36"	36"	36" – 60"	48" – 72"	72" – 120"
	Structures (Minimum Width)	18"	18"	18"	36"	36"
Design Surface ³	Type	Native, ungraded May be continuously rough	Native, limited grading May be continuously rough	Native, with some on- site borrow or imported material where needed for stabilization and occasional grading Intermittently rough	Native with improved sections of borrow or imported material, and routine grading Minor roughness	Likely imported material, and routine grading Uniform, firm, and stable
	Protrusions	≤ 24" Likely common and continuous	≤ 6" May be common and continuous	≤ 3" May be common, not continuous	≤ 3" Uncommon, not continuous	No protrusions
	Obstacles (Maximum Height)	24"	14"	10"	8"	No obstacles
Design Grade ³	Target Grade	5% – 25%	5% – 18%	3% – 12%	2% – 10%	2% – 5%
	Short Pitch Maximum	40%	35%	25%	15%	5% FSTAG: 5% – 12% ²
	Maximum Pitch Density	20% – 40% of trail	20% – 30% of trail	10% – 20% of trail	5% – 20% of trail	0% – 5% of trail
Design Cross Slope	Target Cross Slope	Natural side slope	5% – 20%	5% – 10%	3% – 7%	2% – 3% (or crowned)
	Maximum Cross Slope	Natural side slope	25%	15%	10%	3%
Design Clearing	Height	8'	8' – 7'	7' – 8'	8' – 10'	8' – 10'
	Width	≥ 24" Some vegetation may encroach into clearing area	24" – 48" Some light vegetation may encroach into clearing area	36" – 60"	48" – 72"	60" – 72"
	Shoulder Clearance	3" – 6"	6" – 12"	12" – 18"	12" – 18"	12" – 24"
Design Turn	Radius	No minimum	2' – 3'	3' – 6'	4' – 8'	6' – 8'

¹ For definitions of Design Parameter attributes (e.g., Design Tread Width and Short Pitch Maximum) see FSH 2309.18, section 05.

² Trail Classes 3, 4, and 5, in particular, have the potential to provide accessible passage. If assessing or designing trails for accessibility, refer to the Forest Service Trail Accessibility Guidelines (FSTAG) for more specific technical provisions and tolerances (FSM 2350).

³ The determination of trail-specific Design Grade, Design Surface, and other Design Parameters should be based upon soils, hydrological conditions, use levels, erosion potential, and other factors contributing to surface stability and overall sustainability of the trail.

Designed Use BICYCLE		Trail Class 1	Trail Class 2	Trail Class 3	Trail Class 4	Trail Class 5
Design Tread Width	Single Lane	6" – 12"	12" – 24"	18" – 36"	24" – 48"	36" – 60"
	Double Lane	36" – 48"	36" – 48"	36" – 48"	48" – 84"	72" – 120"
	Structures (Minimum Width)	18"	18"	36"	48"	60"
Design Surface ²	Type	Native, ungraded May be continuously rough Sections of soft or unstable tread on grades < 5% may be common and continuous	Native, with limited grading May be continuously rough Sections of soft or unstable tread on grades < 5% may be common	Native, with some on-site borrow or imported material where needed for stabilization and occasional grading Intermittently rough Sections of soft or unstable tread on grades < 5% may be present, but not common	Native, with improved sections of borrow or imported materials and routine grading Stable, with minor roughness	Likely imported material and routine grading Uniform, firm, and stable
	Protrusions	≤ 24" Likely common and continuous	≤ 6" May be common and continuous	≤ 3" May be common, but not continuous	≤ 3" Uncommon and not continuous	No protrusions
	Obstacles (Maximum Height)	24"	12"	10"	8"	No obstacles
Design Grade ²	Target Grade	5% – 20%	5% – 12%	3% – 10%	2% – 8%	2% – 5%
	Short Pitch Maximum	30% 50% on downhill segments only	25% 35% on downhill segments only	15%	10%	8%
	Maximum Pitch Density	20% – 30% of trail	10% – 30% of trail	10% – 20% of trail	5% – 10% of trail	0% – 5% of trail
Design Cross Slope	Target Cross Slope	5% – 10%	5% – 8%	3% – 8%	3% – 5%	2% – 3%
	Maximum Cross Slope	10%	10%	8%	5%	5%
Design Clearing	Height	6'	6' – 8'	8'	8' - 9'	8' - 9'
	Width	24" – 36" Some vegetation may encroach into clearing area	36" – 48" Some light vegetation may encroach into clearing area	60" – 72"	72" – 96"	72" – 96"
	Shoulder Clearance	0' – 12'	6' – 12'	6' – 12"	6" – 18"	12" – 18"
Design Turn	Radius	2' – 3'	3' – 6'	4' – 8'	8' – 10'	8' - 12'

¹ For definitions of Design Parameter attributes (e.g., Design Tread Width and Short Pitch Maximum) see FSH 2309.18, section 05.

² The determination of trail-specific Design Grade, Design Surface, and other Design Parameters should be based upon soils, hydrological conditions, use levels, erosion potential, and other factors contributing to surface stability and overall sustainability of the trail.

Designed Use PACK AND SADDLE		Trail Class 1	Trail Class 2	Trail Class 3	Trail Class 4	Trail Class 5
Design Tread Width	Wilderness (Single Lane)	Typically not designed or actively managed for equestrians, although use may be allowed	12" – 18" May be up to 48" along steep side slopes 48" – 60" or greater along precipices	18" – 24" May be up to 48" along steep side slopes 48" – 60" or greater along precipices	24" May be up to 48" along steep side slopes 48" – 60" or greater along precipices	Typically not designed or actively managed for equestrians, although use may be allowed
	Non-Wilderness (Single Lane)		12" – 24" May be up to 48" along steep side slopes 48" – 60" or greater along precipices	18" – 48" 48" – 60" or greater along precipices	24" – 96" 48" – 60" or greater along precipices	
	Non-Wilderness (Double Lane)		60"	60" – 84"	84" – 120"	
	Structures (Minimum Width)		Other than -bridges: 36" Bridges without handrails: 60" Bridges with handrails: 84" clear width	Other than bridges: 36" Bridges without handrails: 60" Bridges with handrails: 84" clear width	Other than bridges: 36" Bridges without handrails: 60" Bridges with handrails: 84" clear width	
Design Surface ²	Type		Native, with limited grading May be frequently rough	Native, with some on-site borrow or imported material where needed for stabilization and occasional grading Intermittently rough	Native, with improved sections of borrow or imported material and routine grading Minor roughness	
	Protrusions		≤ 6" May be common and continuous	≤ 3" May be common, not continuous	≤ 3" Uncommon, not continuous	
	Obstacles (Maximum Height)		12"	6"	3"	
Design Grade ²	Target Grade		5% – 20%	3% – 12%	2% – 10%	
	Short Pitch Maximum		30%	20%	15%	
	Maximum Pitch Density		15% – 20% of trail	5% – 15% of trail	5% – 10% of trail	
Design Cross Slope	Target Cross Slope		5% – 10%	3% – 5%	0% – 5%	
	Maximum Cross Slope		10%	8%	5%	
Design Clearing	Height		8' – 10'	10'	10' – 12'	
	Width		72" Some light vegetation may encroach into clearing area	72" – 96"	96"	
	Shoulder Clearance		6" – 12" Pack clearance: 36" x 36"	12" – 18" Pack clearance: 36" x 36"	12" – 18" Pack clearance: 36" x 36"	
Design Turn	Radius		4' – 5'	5' – 8'	6' – 10'	

¹ For definitions of Design Parameter attributes (e.g., Design Tread Width and Short Pitch Maximum) see FSH 2309.18, section 05.

A Few Projects...





LOW

POW

THUNK!



ZAMMM!



Where Do You Fit In?



Questions?

