

Draft
Barton and Murray Combined Sewer Overflow Control Facilities Plan

Prepared for:
King County Wastewater Treatment Division

By
Tetra Tech, Inc. and Carollo Engineers

For comments or questions contact:
Shahrzad Namini, Project Manager
King County Department of Natural Resources and Parks
Wastewater Treatment Division
King Street Center
KSC-NR-0507
201 S. Jackson St.
Seattle, WA 98104-3855
shahrzad.namini@kingcounty.gov
(206) 263-6038

Tetra Tech Project #3630023

Alternate Formats Available
206-684-1280 (voice) or 711 (TTY)

KING COUNTY WASTEWATER TREATMENT DIVISION

BARTON AND MURRAY COMBINED SEWER OVERFLOW CONTROL FACILITIES PLAN

TABLE OF CONTENTS

VOLUME 1 OF 3

CHAPTER 1 Executive Summary

1.1 Background..... 1-1
1.2 Basis of Planning 1-3
1.3 Preliminary Alternative Development..... 1-4
1.4 Screening of Preliminary Alternatives..... 1-4
1.5 Refinement of Short-listed Alternatives 1-4
 1.5.1 Murray CSO Basin..... 1-4
 1.5.2 Barton CSO Basin 1-6
1.6 Final Evaluation and Selection Process 1-6
1.7 Proposed Alternative 1-11
 1.7.1 Barton CSO Basin 1-11
 1.7.2 Murray CSO Basin..... 1-12

CHAPTER 2 Introduction

2.1 Problem Identification 2-1
2.2 Project Background 2-1
 2.2.1 CSO Control Requirements..... 2-1
 2.2.2 History of CSO Control in King County..... 2-4
 2.2.3 Current CSO Control Status in King County..... 2-5
 2.2.4 Previous Studies..... 2-7
2.3 Current Project..... 2-11
 2.3.1 Project Priority and Timeline..... 2-11
 2.3.2 Planning Period 2-11
2.4 Facility Plan Requirements 2-11
2.5 Contact Information 2-15

CHAPTER 3 Existing Conditions

3.1 Human Environment..... 3-1
 3.1.1 Land Use 3-1
 3.1.2 Wastewater System..... 3-3
 3.1.3 Public Health 3-9
 3.1.4 Cultural Resources 3-9
3.2 Physical Environment 3-9
 3.2.1 Land..... 3-9
 3.2.2 Surface Water..... 3-15
 3.2.3 Rainfall..... 3-16
 3.2.4 Air 3-16
 3.2.5 Sensitive Areas..... 3-16
3.3 Endangered/Threatened Species and Habitats..... 3-17

CHAPTER 4 Basis of Planning

4.1 System Modeling 4-1
 4.1.1 Model Description..... 4-1
 4.1.2 Data 4-2
 4.1.3 Long-Term Simulations 4-4

BARTON AND MURRAY COMBINED SEWER OVERFLOW CONTROL FACILITIES PLAN
TABLE OF CONTENTS

4.2	CSO Control Approaches	4-4
4.2.1	Control Approach 1—Peak-Flow Storage	4-4
4.2.2	Control Approach 2—Convey and Treat	4-7
4.2.3	Control Approach 3—End-of-Pipe Treatment	4-9
4.2.4	Control Approach 4—Peak Flow Reduction.....	4-9
4.2.5	Control Approach 5—Combined Approach.....	4-9
4.3	Basis of Planning Criteria	4-9
CHAPTER 5 Methodology for Developing and Evaluating Alternatives		
5.1	Overview	5-1
5.2	Phase 1	5-2
5.2.1	Step 1.1: Define Criteria Categories.....	5-2
5.2.2	Step 1.2: Identify Control Approaches.....	5-2
5.2.3	Step 1.3: Develop Initial Conceptual Alternatives	5-4
5.2.4	Step 1.4: Evaluation and Initial Results.....	5-4
5.3	Phase 2	5-5
5.3.1	Step 2.1: Develop and Evaluate CSO Control Alternatives.....	5-5
5.3.2	Step 2.2: Alternatives Screening.....	5-13
5.3.3	Step 2.3: Selection of a Preferred Project.....	5-13
5.4	Basis of Design	5-15
CHAPTER 6 Preliminary Alternatives		
6.1	No Action Alternatives	6-1
6.2	Identification of Preliminary Sites	6-1
6.3	Preliminary Alternatives Overview.....	6-4
6.4	Preliminary Barton CSO Basin Alternatives	6-7
6.4.1	Alternatives Using Control Approach 1 – Peak-Flow Storage.....	6-7
6.4.2	Alternative Using Control Approach 3 - End of Pipe Treatment ..	6-10
6.4.3	Alternative Using Control Approach 4 – Peak-Flow Reduction ...	6-10
6.5	Preliminary Murray CSO Basin Alternatives.....	6-11
6.5.1	Alternatives Using Control Approach 1 – Peak-Flow Storage.....	6-11
6.5.2	Alternative Using Control Approach 2 – Convey and Treat.....	6-13
6.5.3	Alternative Using Control Approach 3 - End of Pipe Treatment ..	6-14
6.5.4	Alternative Using Control Approach 5 – Combined Approaches.	6-14
6.6	Refined Preliminary Alternatives	6-15
CHAPTER 7 Alternatives Evaluation and Selection		
7.1	Overview	7-1
7.2	Preliminary Short-List Development.....	7-1
7.2.1	Barton CSO Basin Preliminary Short-List.....	7-1
7.2.2	Murray CSO Basin Preliminary Short-List.....	7-2
7.3	Murray Basin Community Advisory Group Alternatives.....	7-3
7.3.1	Community Advisory Group Process	7-3
7.3.2	Community Advisory Group Alternatives.....	7-4
7.3.3	Community Advisory Group Recommendations	7-7
7.3.4	Coarse Screening of Murray Basin Alternatives.....	7-7
7.3.5	Murray Basin—Final Short List.....	7-11
7.4	Final Short-Listed Alternatives—Barton Basin	7-11
7.4.1	Refinement of Barton Alternatives.....	7-11
7.4.2	Barton Alternative 1E—Pipe Storage in Upper Fauntleroy Way .	7-12
7.4.3	Barton Alternative 1F—Buried Rectangular Storage Tank, at Fauntleroy School	7-14
7.4.4	Barton Alternative 4A (GSI)—Green Stormwater Infrastructure in Sub-Basin 416.....	7-17

BARTON AND MURRAY COMBINED SEWER OVERFLOW CONTROL FACILITIES PLAN
TABLE OF CONTENTS

7.5	Final Short-Listed Alternatives—Murray Basin	7-19
7.5.1	Refinement of Murray Alternatives	7-19
7.5.2	Murray Alternative 1A—Storage at Lowman Beach Park.....	7-20
7.5.3	Murray Alternative 1F—Beach Drive Area Underground Storage.....	7-22
7.5.4	Alternative CAG 2-a—Storage at Lincoln Park Lower Parking Lot.....	7-24
7.6	Selection of Proposed Projects.....	7-26
7.6.1	Refinement of the Evaluation Criteria.....	7-26
7.6.2	Evaluation Process.....	7-27
7.7	Proposed Alternatives for Further Environmental Review	7-31
CHAPTER 8 Proposed Alternative		
8.1	Barton CSO Basin Proposed Alternative Overview	8-1
8.1.1	Overflow Frequency and Volume	8-1
8.1.2	General Layout	8-2
8.1.3	Wet-Weather Flow Description.....	8-2
8.1.4	Facility Sizing.....	8-3
8.2	Murray CSO Basin Proposed Alternative Overview	8-6
8.2.1	Overflow Frequency and Volume	8-7
8.2.2	General Layout	8-7
8.2.3	Process Flow	8-12
8.2.4	Hydraulic Profile	8-14
8.2.5	Facility Sizing.....	8-14
8.3	Environmental Impacts	8-14
8.3.1	Barton GSI Alternative.....	8-14
8.3.2	Murray Alternative 1F	8-19
8.4	Design Life.....	8-24
8.4.1	Barton GSI Alternative.....	8-24
8.4.2	Murray Alternative 1F	8-24
8.5	Residuals Management.....	8-24
8.5.1	Barton GSI Alternative.....	8-24
8.5.2	Murray Alternative 1F	8-24
8.6	Ability to Expand.....	8-24
8.7	O&M and Staffing Needs.....	8-25
8.7.1	Barton GSI Alternative.....	8-25
8.7.2	Murray Alternative 1F	8-25
8.8	Design Guidelines.....	8-30
8.8.1	Site Design	8-30
8.8.2	Traffic.....	8-30
8.8.3	Structural/Geotechnical	8-30
8.8.4	Stormwater Management	8-30
8.8.5	Architecture/Landscaping	8-30
8.8.6	O&M and Facility Inspections	8-31
8.8.7	Reliability	8-31
8.8.8	Effects of Sea Level Rise	8-32
8.9	Feasibility of Implementation	8-33
8.9.1	Barton GSI Alternative.....	8-33
8.9.2	Murray Alternative 1F	8-34
CHAPTER 9 Financial Analysis		
9.1	Estimated Costs.....	9-1
9.1.1	Construction Cost Estimate	9-1
9.1.2	Project Cost Estimate	9-1
9.1.3	Operation and Maintenance Costs	9-2

BARTON AND MURRAY COMBINED SEWER OVERFLOW CONTROL FACILITIES PLAN
TABLE OF CONTENTS

9.1.4	Life-Cycle Cost Estimate	9-3
9.2	Project Financing.....	9-3
9.2.1	Financial Capability	9-3
9.2.2	Capital Financing Plan	9-4
9.2.3	Customer Charges	9-4
CHAPTER 10	Implementation Plan	
10.1	Project Schedule	10-1
10.2	Required Permits.....	10-1
10.3	Next Step Recommendations.....	10-2
CHAPTER 11	Miscellaneous Requirements	
11.1	Water Quality Management Plan Conformance	11-1
11.2	State Environmental Policy Act Compliance	11-1
11.3	State Environmental Review Process Compliance	11-1
11.3.1	National Historic Preservation Act/Archaeological and Historic Preservation Act	11-1
11.3.2	Clean Air Act	11-2
11.3.3	Coastal Zone Management Act.....	11-2
11.3.4	Endangered Species Act.....	11-2
11.3.5	Farmland Protection Policy Act	11-2
11.3.6	Fish and Wildlife Coordination Act	11-2
11.3.7	Executive Order 11988, Floodplain Management	11-2
11.3.8	Executive Order 11990, Protection of Wetlands	11-2
11.3.9	Wild and Scenic Rivers Act	11-2
11.4	Public Involvement and Outreach.....	11-3
11.4.1	Agency Stakeholder Engagement Process.....	11-3
11.4.2	Public Meetings and Briefings.....	11-3
11.4.3	Public Information.....	11-5
11.4.4	Comment Tracking and Response Process.....	11-6

APPENDICES

VOLUME 2 OF 3

APPENDIX A	FLOW MODELING AND CALIBRATION DOCUMENTATION	
	Modeling and Calibration Technical Reports	
	Flows and Storage Volumes	
	Technical Memorandum 600.5 CSO Beach Projects Demand Management Analysis	
	Green Stormwater Infrastructure Analysis	
	Summary of Technical Memorandums & SvR Recommendations	
	GSI Planning and Analysis Confirmation	
	Sensitivity Analysis for GSI Alternative Modeling	
	Addendum #2 to Technical memorandum 600.6	
	Volume Comparison and GSI Recommendations	

VOLUME 3 OF 3

APPENDIX B	ALTERNATIVE EVALUATION SUMMARY DOCUMENTATION
APPENDIX C	PUBLIC INVOLVEMENT DOCUMENTATION
APPENDIX D	STATE ENVIRONMENTAL POLICY ACT (SEPA) DOCUMENTATION <i>(To Be Provided When Available)</i>
APPENDIX E	PRELIMINARY GEOTECHNICAL/ENVIRONMENTAL DOCUMENTATION
APPENDIX F	COST DATA
APPENDIX G	ALTERNATIVE RISK REGISTERS

LIST OF FIGURES

Figure 1.1	Barton and Murray CSO Basins Vicinity	1-2
Figure 1.2	Barton CSO Basin Proposed Alternative 4A (GSI): GSI in Sub-Basin 416....	1-13
Figure 1.3	Murray CSO Basin Proposed Alternative 1F: Beach Drive Area Underground Storage	1-15
Figure 2.1	Barton and Murray CSO Basins Vicinity	2-2
Figure 2.2	King County CSO Control Program Overview	2-5
Figure 2.3	CSO Control Project Priorities	2-6
Figure 3.1	Barton and Murray CSO Basins Land Use	3-2
Figure 3.2	Local Sewer Collection System	3-4
Figure 3.3	Existing Barton CSO Basin CSO Control Structure	3-6
Figure 3.4	Existing Murray CSO Basin CSO Control Structure	3-7
Figure 3.5	CSO and Regional Conveyance System	3-8
Figure 3.6	Barton CSO Basin Geology	3-10
Figure 3.7	Murray CSO Basin Geology	3-11
Figure 3.8	Barton and Murray CSO Basins Topography	3-14
Figure 3.9	Barton CSO Basin Sensitive Areas	<i>after</i> 3-14
Figure 3.10	Murray CSO Basin Sensitive Areas	<i>after</i> 3-16
Figure 4.1	Barton CSO Basin Flow Meter Schematic	4-3
Figure 4.2	Murray CSO Basin Flow Meter Schematic	4-3
Figure 4.3	Sub-Basin Flow Distribution in Barton CSO Basin	4-6
Figure 4.4	Barton Mid-Basin Storage Calculation for Barton CSO Basin	4-7
Figure 4.5	Sub-Basin Flow Distribution in Murray CSO Basin	4-8
Figure 5.1	Basis of Design Typical Detail for Rectangular Storage Tanks	5-17
Figure 5.2	Basis of Design Typical Detail for Storage Pipe	5-18
Figure 5.3	Basis of Design Typical Detail for Pump Station	5-19
Figure 6.1	Candidate Sites	6-3
Figure 6.2	Barton CSO Basin Alternative 1A: Rectangular Storage at Bottom of Basin	<i>after</i> 6-6
Figure 6.3	Barton CSO Basin Alternative 1B: Circular Storage at Bottom of Basin..	<i>after</i> 6-8
Figure 6.4	Barton CSO Basin Alternative 1C: Pipe Storage at Bottom of Basin.....	<i>after</i> 6-8
Figure 6.5	Barton CSO Basin Alternative 1D: Pipe Storage in Right-of-Way at Bottom of Basin	<i>after</i> 6-8
Figure 6.6	Barton CSO Basin Alternative 1E: Pipe Storage in Upper Fauntleroy Way SW	<i>after</i> 6-8
Figure 6.7	Barton CSO Basin Alternative 1F: Storage in Vicinity of Fauntleroy School.....	<i>after</i> 6-8
Figure 6.8	Barton CSO Basin Alternative 1G: Rectangular Storage in Upper Basin	<i>after</i> 6-10
Figure 6.9	Barton CSO Basin Alternative 3A: End-of-Pipe Treatment at Bottom of Basin	<i>after</i> 6-10
Figure 6.10	Barton CSO Basin Alternative 4A: Peak Flow Reduction by Roof Drain Disconnection.	<i>after</i> 6-10
Figure 6.11	Murray CSO Basin Alternative 1A: Rectangular Storage at Bottom of Basin	<i>after</i> 6-10

BARTON AND MURRAY COMBINED SEWER OVERFLOW CONTROL FACILITIES PLAN
TABLE OF CONTENTS


Figure 6.12	Murray CSO Basin Alternative 1B: Circular Storage in Vicinity of Murray Avenue and Lincoln Park Way.....	after 6-10
Figure 6.13	Murray CSO Basin Alternative 1C: Distributed Storage Along Beach Drive and Murray Avenue SW	after 6-12
Figure 6.14	Murray CSO Basin Alternative 1D: Pipe Storage at Bottom of Basin by Tunneling	after 6-12
Figure 6.15	Murray CSO Basin Alternative 1E: Upper Basin Storage	after 6-12
Figure 6.16	Murray CSO Basin Alternative 1F: Combined Pipe and Rectangular Storage at Bottom of Basin.....	after 6-12
Figure 6.17	Murray CSO Basin Alternative 2A: Convey and Treat at Alki	after 6-12
Figure 6.18	Murray CSO Basin Alternative 3A: End-of-Pipe Treatment at the Bottom of the Basin.....	after 6-14
Figure 6.19	Murray CSO Basin Alternative 5A: Peak Flow Reduction by Roof Drain Disconnection, Combined with Storage.	after 6-14
Figure 7.1	Final Barton Alternative 1E— Pipe Storage in Upper Fautleroy.....	after 7-12
Figure 7.2	Final Barton Alternative 1F— Buried Rectangular Storage Tank at Fautleroy School.....	after 7-14
Figure 7.3	Final Barton Alternative 4A (GSI)— Green Stormwater Infrastructure in Sub-Basin 416	after 7-18
Figure 7.4	Final Murray Alternative 1A— Storage at Lowman Beach Park	after 7-20
Figure 7.5	Final Murray Alternative 1F— Beach Drive Area Underground Storage	after 7-22
Figure 7.6	Final Murray 2A— Storage at Lincoln Park Lower Parking Lot.....	after 7-24
Figure 8.1	Barton CSO Basin Proposed Alternative 4A (GSI): GSI in Sub-Basin 416.....	after 8-2
Figure 8.2	Modeled November 1-2, 1984 Design Storm Hydrograph at Barton Pump Station	8-4
Figure 8.3	Estimated Flows Captured by Rain Gardens and Diverted from the Barton Pump Station During Design Storms	8-5
Figure 8.4	Murray CSO Basin Proposed Alternative 1F: Beach Drive Area Underground Storage	after 8-8
Figure 8.5	Diversion Structure Plan and Sections.....	after 8-8
Figure 8.6	Storage Tank Conceptual Plan	after 8-10
Figure 8.7	Storage Tank Sections.....	after 8-10
Figure 8.8	Storage Tank Sections.....	after 8-10
Figure 8.9	Storage Tank Equipment Facility Plan and Sections	after 8-10
Figure 8.10	Murray Storage Tank Dry- and Moderately Wet-Weather Flow Operation	8-13
Figure 8.11	Murray Storage Tank High Wet-Weather Flow Operation	8-13
Figure 8.12	CSO Control System Process Flow Diagram.....	after 8-14
Figure 8.13	CSO Control System Hydraulic Profile.....	after 8-14

LIST OF TABLES

Table 1.1	Basis of Planning Criteria for Barton and Murray CSO Basins	1-3
Table 1.2	Barton CSO Basin Preliminary Alternatives.....	1-5
Table 1.3	Murray CSO Basin Preliminary Alternatives	1-5
Table 1.4	Barton Short Listed Alternatives Evaluation Summary Data.....	1-7
Table 1.5	Murray Short Listed Alternatives Evaluation Summary Data	1-9
Table 1.6	Project Cost Summary for Proposed Barton CSO Basin Project.....	1-14
Table 1.7	O&M Cost Summary for Proposed Barton CSO Basin Project.....	1-14
Table 1.8	Preliminary Project Schedule for Proposed Barton CSO Basin Project.....	1-14
Table 1.9	Project Cost Summary for Proposed Murray CSO Basin Project	1-16
Table 1.10	O&M Cost Summary for Proposed Murray CSO Basin Project	1-16
Table 1.11	Preliminary Project Schedule for Proposed Murray CSO Basin Project.....	1-16
Table 2.1	Facility Plan Requirements	2-12
Table 3.1	Land Use in Barton and Murray CSO Basins	3-1
Table 4.1	Basis of Planning Criteria for Barton and Murray CSO Basins	4-9
Table 5.1	Initial Evaluation Criteria	5-3
Table 5.2	Evaluation Category Development	5-6
Table 5.3	Evaluation Criteria, Questions and Rating Scale.....	5-7
Table 5.4	Screening Steps and Schedule for Shortlist of Alternatives	5-14
Table 5.5	Basis of Design Criteria	5-15
Table 6.1	Barton CSO Basin Preliminary Sites	6-2
Table 6.2	Murray CSO Basin Preliminary Sites.....	6-2
Table 6.3	Barton CSO Basin Preliminary Alternatives.....	6-5
Table 6.4	Murray CSO Basin Preliminary Alternatives	6-6
Table 7.1	Murray Community Advisory Group Meetings	7-5
Table 7.2	Murray Basin CSO Coarse Screening Matrix	7-8
Table 7.3	Barton Basin Short-Listed Alternatives Data	7-12
Table 7.4	Murray Basin Short-Listed Alternatives Data.....	7-19
Table 7.5	Barton Short Listed Alternatives Evaluation Summary Data.....	7-27
Table 7.6	Murray Short Listed Alternatives Evaluation Summary Data	7-29
Table 8.1	CSO Frequency and Volume from the Barton Basin	8-2
Table 8.2	Barton Basin CSO Facility Sizing	8-6
Table 8.3	CSO Frequency and Volume from the Murray Basin.....	8-7
Table 8.4	Murray CSO Basin CSO Facility Sizing	8-15
Table 8.5	Operation Activities for Barton GSI Alternative	8-26
Table 8.6	Maintenance Activities for Barton GSI Alternative	8-26
Table 8.7	Operation and Maintenance Activities for Murray Alternative 1F.....	8-27
Table 8.8	Puget Sound Sea-Level Rise Scenarios with Storm Surge	8-32
Table 9.1	Construction Cost Summary	9-2
Table 9.2	Project Cost Summary	9-2
Table 9.3	O&M Cost Summary	9-3
Table 10.1	Preliminary Project Schedule for Proposed Barton CSO Project.....	10-1
Table 10.2	Preliminary Project Schedule for Proposed Murray CSO Project.....	10-1


CERTIFICATION

The Barton and Murray Combined Sewer Overflow Control Facilities Plan has been prepared under the direction of the following Registered Professional Engineer:

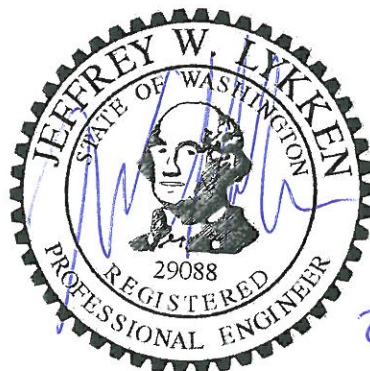


2-11-2011

The landscape and civil engineering prepared by SvR Design Company for Green Stormwater Infrastructure Alternative analysis in the Barton Basin has been prepared under the direction of the following Registered Professional Landscape Architect and Civil Engineer, respectively:



STATE OF WASHINGTON
REGISTERED
LANDSCAPE ARCHITECT
Margaret Rose Staeheli
MARGARET ROSE STAEHEL
CERTIFICATE NO. 456

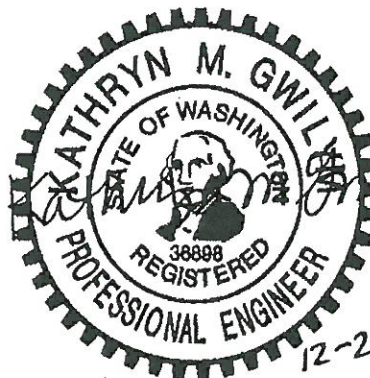

12-22-2010